# White Emitting Color Portable Tripod Balloon Light for LED Mobile Lighting Towers

## **Basic Information**

• Place of Origin:

Model Number:

- Brand Name:
- UShineray
- YXR-BL-1000W-A
- Minimum Order Quantity:
- Price:

Guangdong, China

- 2 pieces
  - \$772.90 \$796.90/pieces



## **Product Specification**

| <ul> <li>Color</li> </ul> | Temperature(CCT): | 5000K |
|---------------------------|-------------------|-------|
| <ul> <li>Color</li> </ul> | Temperature(CCT): | 5000K |

| <ul> <li>IP Rating:</li> </ul>                          | IP65      |
|---|-----------|
| <ul> <li>Beam Angle(°):</li> </ul>                      | 360°      |
| • CRI (Ra>):  | 70        |
| <ul> <li>Input Voltage(V):</li> </ul>                   | AC90-305V |
| <ul> <li>Lamp Luminous<br/>Efficiency(Im/w):</li> </ul> | 160       |
| • Lamp Luminous Flux(Im):                               | 160000    |
| <ul> <li>Warranty(Year):</li> </ul>                     | 5-Year    |
| <ul> <li>Working Lifetime(Hour):</li> </ul>             | 50000     |
| Color Rendering Index(Ra):                              | 70        |
| <ul> <li>Emitting Color:</li> </ul>                     | White     |
| <ul> <li>Power Supply:</li> </ul>                       | AC        |
| Light Source:   | LED       |



NO



# More Images









## **Product Description**



**Features:** 1. Color temperature adjustable, Dimmable(≤320W); 2. Foldable tripod and cover; Lightweight; Portable; Easy quick setup; 3. Glare-free; Diffused light; 360° illumination; Dimmable; On-off button switch; 4. High Efficiency ≥160lm/W; Low power consumption; 5. Weather resistance; Life span > 50,000hrs; Low maintenance. 6. Balloon material: Waterproof, translucent, anti-UV, flame-retardant outdoor gauze. 7. Filtration device: Dust absorption

## Specification

| Model E<br>YXR-BL-        | 500W-A        | 600W-A | 700W-A  | 800W-A      | 1000W-A | 1200W-A  | 1400W-A |  |  |
|---------------------------|---------------|--------|---------|-------------|---------|----------|---------|--|--|
| Power                     | 500W          | 600W   | 700W    | 800W        | 1000W   | 1200W    | 1400W   |  |  |
| Lumen(L<br>M)             | 80000         | 96000  | 112000  | 128000      | 165000  | 192000   | 213000  |  |  |
| Weight(kg<br>)            | 17.5          | 18.1   | 18.5    | 18.8        | 20      | 21       | 22      |  |  |
| Inflated<br>Dimensio<br>n | D70*H60       |        | D90*H60 |             |         | D110*H85 |         |  |  |
| Efficacy                  |               |        |         | 160LM/W     |         |          |         |  |  |
| CCT                       |               |        |         | 5000K       |         |          |         |  |  |
| CRI                       |               |        |         | ≥70Ra       |         |          |         |  |  |
| LED<br>Chips              | Lumileds 2835 |        |         |             |         |          |         |  |  |
| LED<br>Driver             |               |        |         | Iventronics |         |          |         |  |  |
| PF                        |               |        |         | ≥0.95       |         |          |         |  |  |
|                           |               |        |         |             |         |          |         |  |  |

| Input<br>Voltage |                 | AC90-305V        |            |  |
|------------------|-----------------|------------------|------------|--|
| Life Span        | I               | 50000 hrs        |            |  |
| IP               |                 | IP65             |            |  |
|                  |                 | Tripod           |            |  |
|                  | Height(min-max) | Collapsed Height | Net Weight |  |
|                  | 1620-3800mm     | 1.8m             | 11.5kg     |  |

## **Details Images**




- Color temperature adjustable, Dimmable(\$320W).
- Foldable tripod and cover; Lightweight; Portable; Easy quick setup.
- Glare-free; Diffused light; 360° illumination; Dimmable; On-off button switch.
- High Efficiency ≥160/m/W; Low power consumption.
- Weather resistance; Life span > 50,000hrs; Low maintenance.
- Balloon material: Waterproof, translucent, anti-UV, flame -retardant.
- + Filtration device: Dust absorption.



| USHINERAY | LEO<br>Balloon<br>Light IP65  | LED BALLOON LIGHT Patent Design  |
|-----------|---|--|
|           | BL-60W-120W-A   | Product Features   |
| Ĭ         | Specifications     Adv trial rate     None     Adv trial     None     Adv trial     Adv     Adv | A trade foctor<br>Package Included   |
|           | Restriction         Number of the second                          | Product Size     60W/100W/120W   |
| USHINERAY | LED<br>Balloon<br>Light IP65  | I LED BALLOON LIGHT Patent Design  |
|           | BL-150W-320W-A  | Product Features Ar Briden Vector  |
|           | Histop         Ad/06/07V           Response         Biddes           Fit         Ad/8           LBD Dep         UDreng           LBD Dep         UDreng           LBD Dep         D000m /D000m /D000m           GR         24000m /D000m /D000m           CR         79%           CR         100m+d000m /D000m           Head Onmain         656mx/050em           Response         5100 Higgs Page           Response         1000-Higgs Page           Stand         Cologues range         L00m           Nearoing         L00m         L00m  | <ul> <li>Package Included</li> <li>Image: A state of the state</li></ul> |
|           | ESOW         Refue,(m)         1         0         0         04.6           27 minus/read<br>AseqUT         3         36         201         74           2000V         Refue,(m)         1         4         0         94           2000V         Refue,(m)         1         4         0         94           2000V         Refue,(m)         1         4         0         94           2000V         Refue,(m)         1         4         9         94           2000V         Refue,(m)         34         40         94         35   | 150W/200W/320W   |





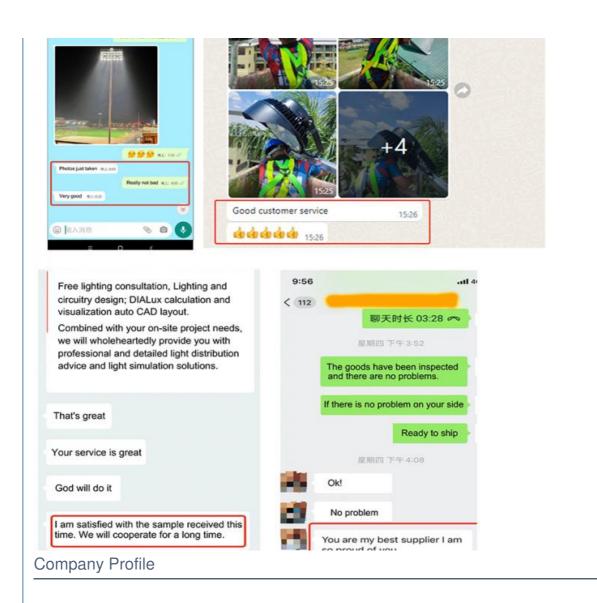



# PRODUCTION SITE







**Guangzhou International Lighting Exhibition** 





## FAQ

#### Q1. Are you a manufacturer ?

Yes, we have our own factory with over 10 years R&D and manufacture experience base on ISO quality management since 2011.

**Q2.** Do you have any MOQ limit for led light order? No MOQ, 1pc for sample checking is available.

#### Q3. Can I get a lower price for large quantity order?

Yes, please check with our sales staff for the details.

#### Q4. How about the lead time of ordering?

Our standard lead time for sample is 3-5 days, and normal order lead time is 7-10 days. For the large order lead time, please also

check with our sales team.

#### Q5. Can you provide OEM and ODM service?

we can provide OEM and ODM product, with customized label design on the product and carton box. Or customized carton box, and laser print logo on the lamp fixture.

## Q6. What is the payment terms of your formal order?

We accept payment via TT, Paypal, Western Union, and we offer EXW terms.

#### Q7. How to deal with the defective?

All of our product are produced in strict quality control system, the defective rate is less than 0.2% according to our shipment records. We offer3- 5 years warranty for this product, if there is any defective during the warranty, please provide the picture or video for the working situation of the defective lights, we will ship the new lights to you within a few days or send it together with your next order.

