USHİNERAY

360° Illumination 60W 100W 120W 320W Glare-Free LED Light Balloon on Tripod for Construction Sites

Basic Information

Place of Origin: Guangdong, China
 Brand Name: UShineray
 Model Number: YXR-BL-60W-A
 Minimum Order Quantity: 2 pieces

• Price: \$166.00/pieces 2-99 pieces



Product Specification

Color Temperature(CCT): 5000K
IP Rating: IP65
Beam Angle(°): 360°
CRI (Ra>): 70

Input Voltage(V): AC100-277V

• Lamp Luminous 160

Efficiency(lm/w):

Lamp Luminous Flux(Im): 9600
Warranty(Year): 5-Year
Working Lifetime(Hour): 50000
Working Temperature(°C): -20~60
Color Rendering Index(Ra): 70

Emitting Color: Cold White, Warm White, White

• Power Supply: Solar, AC, DC

• Light Source: LED



More Images









Products Description



Why Choose Us?

- 1. Original design function: Filtration device Dust absorption
- 2. Wide area coverage with 360° illumination
- 3. Glare-free, diffused lighting; Lightweight and portable 4. High Efficiency ≥160lm/W; Low power consumption;
- 5. Water-resistant LED balloon light rated to IP65 standard 6. Dimmable (≤320W); On-off button switch 7. Foldable tripod and cover, easy quick setup; 8. Weather resistant design including a waterproof, UV resistant and fire retardant balloon; Life span > 50,000hrs;
- 9. Balloon material: Waterproof, translucent, anti-UV, flame-retardant outdoor gauze.

Product Paramenters

i ioduct i aic	unenters					
Model No. YXR-BL	60W-A	100W-A	120W-A	150W-A	200W-A	320W-A
Power	60W	100W	120W	150W	200W	320W
Lumen (Im)	9600	16000	19200	24000	32000	51200
Lamp Weight (kg)	4.5	5.0	5.2	8.5	8.8	9.2
Inflated Dimension	D40*H30			D60*H40		
Light Efficiency	160lm/W					
LED Chips	Lumileds 2835					
Voltage	AC 100-277V					

CRI ≥70Ra

CCT 3000K~6000K (Adjustable)

IP Grade IP65

Work Temp -20~60°C

Tripod


Height(min-max) Collapsed Height Net Weight

1070-1900mm 1.05m 6.3kg

Details Images



- Color temperature adjustable, Dimmable(≤320W).
- Foldable tripod and cover; Lightweight; Portable; Easy quick setup.
- Glare-free; Diffused light; 360" illumination; Dimmable; On-off button switch.
- ♦ High Efficiency ≥160lm/W; Low power consumption.
- Weather resistance; Life span > 50,000hrs; Low maintenance.
- Bailoon material: Waterproof, translucent, anti-UV, flame -retardant.
- Filtration device: Dust absorption.

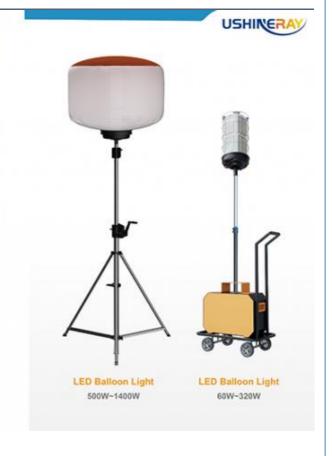





LED BALLOON LIGHT







LED Balloon Light

Specifications

	Piever	MOVES 1000M / SQUIN		
	Viringe	A090-277V		
		50/10-W		
	**	1636		
	LES Smar	Lumbata 2016		
Lamp	LED Chies	Utherway		
	Carter	9600m / 16000m / 16000m		
	CRE	TORa		
	601	2000 HODGA(MINE)		
	Inflated Clarectures	400x000mm		
	Lang Hogie	4 hg 10ng 10ng		
	Height (min)	1070-1900mm		
Stand	Columet Height	1.86m		
	Not streight	6.94		





Package Included















GOW Flathword Area(or) (Area(or)) (Area(or))	1	-	4 301 4	12.6 190 6.6	
100W Reduction Area(or') or resolution (or to	3 154	90 33	*	14 815 85	
120W Reduction or rively areas (14") or rively areas (14") or 150 (40")	1 2 19	* *0 27	200	14.9 600 6.5	

Product Size



60W/100W/120W

















Specifications







Package Included





















150W/200W/320W







I LED BALLOON LIGHT











Specifications

	-	1956.004		
	Power	900W		
	Voltage	A096-000V		
	FF 1636	1010-9		
	17	16.00		
Lamp	180 Driver	Institute		
	LED CHEA	Lambert 2020		
	Samen	80800m		
	ON	790a		
	1001	5000K		
	Inflated Dimension	700ner900nee		
	Lane Wagit	Tring		
Tripod	regionnes	1630-3600nm		
mpos.	Colopset Height	1.5n		
	NetWinget	15.5kg		

Product Features



Package Included





+ Optional









Product Size



500W





















Specifications

	Forer	400W / 750W / 508W		
Lamp	Yeteps	ACIO SERV		
	Preparety	2040-9		
		10 99		
Lamp	LEDONA	Particula		
	LED Chips	(united 200)		
	Lamin	36000m1110000m1108000m		
	.04	70/a		
	730	90004		
	Masc Devenue	907430mm		
	Same Proget	Militage Militage Militage		
	(magnety-model)	1605 5100 mm		
Tripod	Collegent Hospit	184		
	Not Hope	11549		

Product Features













Optional











◆ Product Size



600W/700W/800W







LED BALLOON LIGHT

Product Features





BL-1000W-1400W-A

LED Balloon Light Specifications



•					
1000W	Ma(kuem) Area(m²) Fall gover(in) Half gover(in)	1083	* m 118 m2	* E 3 0	40 600 63 63
1200W	Reducini) Area(mi) Full power(h) Half power(h)	1 10 10 10	4 00 340 71	4 20 40 31	100 100 11
1400W	Reducini) Area(mil) Fut goverbo Half power(h)	1 0 01	4 50 171 101	10 H M	M 8600 0.0 0.0 0.0


























Company Profile

OUR FACTORY









FAQ

Q1. Are you a manufacturer?

Yes, we have our own factory with over 10 years R&D and manufacture experience base on ISO quality management since 2011.

Q2. Do you have any MOQ limit for led light order?

No MOQ, 1 pcs for sample checking is available.

Q3. Can I get a lower price for large quantity order?

Yes, please check with our sales staff for the details.

Q4. How about the lead time of UFO LED High Bay Light?

Our standard lead time for sample is 3-5 days, and normal order lead time is 7-10 days. For the large order lead time, please also check with our sales team.

Q5. Can you provide OEM and ODM service?

we can provide OEM and ODM product, with customized label design on the product and carton box. Or customized carton box, and laser print logo on the lamp fixture.

Q6. What is the payment terms of your formal order?

+8613410523891

We accept payment via T/T, Paypal, Western Union, and we offer EXW terms.

Q7. How to deal with the defective?

All of our product are produced in strict quality control system, the defective rate is less than 0.2% according to our shipment records. We offer 3-5 years warranty for this product, if there is any defective during the warranty, please provide the picture or video for the working situation of the defective lights, we will ship the new lights to you within a few days or send it together with your next order.



joy@ushineray.com 4F, Building C, Junxing Optoelectronic Industrial Park, Fuyuan 2nd Road, FuHai Street, Bao'an District, Shenzhen

ushineraylight.com