Portable Construction Balloon Work Light 150W 360 Degree Illumination High Power LED Tripod Stand

Basic Information

USHİNERAY

• Place of Origin: Guangdong, China

• Brand Name: UShineray

Model Number: YXR-BL-150W-A

• Minimum Order Quantity: 2 pieces

• Price: \$192.60/pieces



Product Specification

Color Temperature(CCT): 5000K
IP Rating: IP65
Beam Angle(°): 360°
CRI (Ra>): 70

• Input Voltage(V): AC 90-305V

• Lamp Luminous 160

Efficiency(lm/w):

Lamp Luminous Flux(Im): 24000
Warranty(Year): 5-Year
Working Lifetime(Hour): 50000
Working Temperature(°C): -20~60
Color Rendering Index(Ra): 70

• Emitting Color: Cold White, Warm White, White

• Power Supply: Solar, AC, DC

• Light Source: LED



More Images









Product Description

Product Description



Features:

- 1. Original design function: Filtration device Dust absorption;
- 2. Wide area coverage with 360° illumination;
- 3. Glare-free, diffused lighting; Lightweight and portable:
- 4. High Efficiency ≥160lm/W; Low power consumption;
- 5. Water-resistant LED balloon light rated to IP65 standard;
- 6. Dimmable (≤320W); On-off button switch;
- 7. Foldable tripod and cover, easy quick setup;
- 8. Weather resistant design including a waterproof, UV resistant and fire retardant balloon; Life span >50,000hrs;
- 9. Balloon material: Waterproof, translucent, anti-UV, flame-retardant outdoor gauze.


Specification

Opcomodilon							
Model No.YXR-BL	60W-A	100W-A	120W-A	150W-A	200W-A	320W-A	
Power	60W	100W	120W	150W	200W	320W	
Lumen (lm)	9600	16000	19200	24000	32000	51200	
Lamp Weight (kg)	4.5	5.0	5.2	8.5	8.8	9.2	
Inflated Dimension		D40*H30			D60*H40		
Light Efficiency			160±5l	m/W			
LED Chips			Lumileds	2835			
Voltage			AC 100-	-277V			
CRI			≥70F	Ra			
CCT			3000K~6000K	(Adjustable)			
IP Grade			IP6	5			
Work Temp			-20~6	0°C			
			Tripod				
Heig	ht(min-max)		Collapse	d Height	Net W	eight	

Details Images



- Color temperature adjustable, Dimmable(≤320W).
- Foldable tripod and cover; Lightweight; Portable; Easy quick setup.
- Glare-free; Diffused light; 360° illumination; Dimmable; On-off button switch.
- ♦ High Efficiency ≥160lm/W; Low power consumption.
- Weather resistance; Life span > 50,000hrs; Low maintenance.
- Balloon material: Waterproof, translucent, anti-UV, flame -retardant.
- Filtration device: Dust absorption.

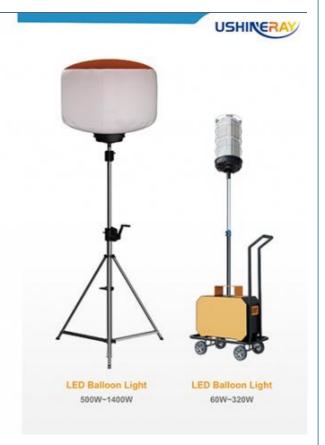





LED BALLOON LIGHT







LED Balloon Light

Specifications

Lamp	Please	90Vc11009c150090		
	Yillage	A090-277V		
	Frequency	50/10-W		
	**	1616		
	LES Smar	(um debt 2016		
	LED Chies	Utherway		
	Carter	9600m-/ 16000m-/ 16000m		
	CRE	TORu		
	601	2000 4000QA(palety)		
	Inflated Clarectures	400x000mm		
	Lang Hogie	4 hg 10ng 10ng		
Stand	Height (min)	1070-1900mm		
	Columet Height	1.86m		
	Not streight	6.94		





Package Included















	D			
GOW Flathword Area(or) (Area(or)) (Area(or))	1	-	4 301 4	12.6 190 6.6
100W Reduction Area(or') or resolution (or to	3 154	90 33	*	14 815 85
120W Reduction or rively areas (14") or rively areas (14") or 150 (40")	1 2 19	* *0 27	200	14.9 600 6.5

Product Size



60W/100W/120W

















Specifications







Package Included





















150W/200W/320W







I LED BALLOON LIGHT











Specifications

	-	1956.004		
	Power	900W		
	Voltage	A096300V		
	Frearry	1010-9		
	17	1636		
Lamp	180 Driver	Institute		
	LED CHEA	Landon 2020		
	Samen	ACASEM-		
	CRI .	196a		
	1001	5000K		
	Inflated Dimension	700ner900nee		
	Lane Wagit	Tring		
Tripod	regionnes	1630-3600nm		
1100	Colopset Height	1.5n		
	NetWinget	15.5kg		

Product Features



Package Included





+ Optional









Product Size



500W





















Specifications

	Forer	400W / T00W / 500W	
	Yeteps	ACIO SERV	
	Preparety	2040-9	
		10.99	
	LEDONA	Particula	
Lamp	LED Chips	Lorent 200	
	Lamin	36000m/110000m/108000m	
	.04	70/a	
	730	9004	
	Masc Devenue	9001430mm	
	Same Proget	Milling Milling Milling	
Tripod	(magnety-model)	1605 5100 mm	
	Collegent Hospit	184	
	Not Hope	11549	

Product Features













Optional











◆ Product Size



600W/700W/800W












Feedback

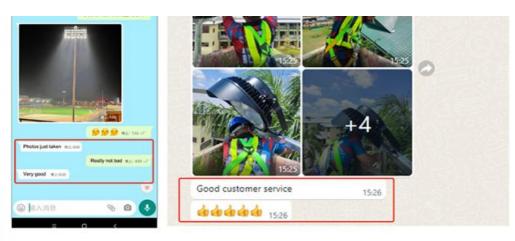

Free lighting consultation, Lighting and circuitry design; DIALux calculation and visualization auto CAD layout.

Combined with your on-site project needs, we will wholeheartedly provide you with professional and detailed light distribution advice and light simulation solutions.

That's great

Your service is great

God will do it


I am satisfied with the sample received this time. We will cooperate for a long time.



Company Profile

OUR FACTORY



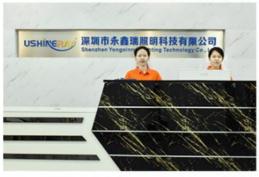



PRODUCTION SITE





































Guangzhou International Lighting Exhibition





FAQ

Q1. Are you a manufacturer?

Yes, we have our own factory with over 10 years R&D and manufacture experience base on ISO quality management since 2011.

Q2. Do you have any MOQ limit for led light order?

No MOQ, 1pc for sample checking is available.

Q3. Can I get a lower price for large quantity order?

Yes, please check with our sales staff for the details.

Q4. How about the lead time of ordering?

Our standard lead time for sample is 3-5 days, and normal order lead time is 7-10 days. For the large order lead time, please also check with our sales team.

Q5. Can you provide OEM and ODM service?

we can provide OEM and ODM product, with customized label design on the product and carton box. Or customized carton box, and laser print logo on the lamp fixture.

Q6. What is the payment terms of your formal order?

We accept payment via TT, Paypal, Western Union, and we offer EXW terms.

Q7. How to deal with the defective?

All of our product are produced in strict quality control system, the defective rate is less than 0.2% according to our shipment records. We offer3- 5 years warranty for this product, if there is any defective during the warranty, please provide the picture or video for the working situation of the defective lights, we will ship the new lights to you within a few days or send it together with your next order.





joy@ushineray.com

e ushineraylight.com