200w Led Balloon Lighting Balloon Light Tower For Construction

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: UShineray
- Certification: CE, RoHs, ETL
- Model Number: YXR-BL-200W-A
- Minimum Order Quantity: 1pcs
- Payment Terms: T/T, Paypal, Western Union

Product Specification

- Color Temperature(CCT): 3000-6000K
- IP Rating: IP65
- Beam Angle(°): 360°
- CRI (Ra>): 70
- Input Voltage(V): AC100-277V
- Lamp Luminous Efficiency(lm/w): 160
- Lamp Luminous Flux(lm): 32000
- Warranty(Year): 5-Year
- Working Lifetime(Hour): 50000
- Color Rendering Index(Ra): 70
- Emitting Color: White
- Power Supply: AC
- Light Source: LED
- Support Dimmer: Yes

More Images

Product Description

Descriptions

LED balloon light towers offer an efficient and eco-friendly lighting solution with advanced LED technology. These light towers consume less power, providing bright illumination while minimizing energy consumption. With 360-degree illumination, they ensure maximum visibility and coverage, making them ideal for large outdoor areas, events, construction sites, and emergencies. The portable and easy-to-set-up design, featuring collapsible telescopic masts and lightweight balloon fixtures, allows for quick deployment. The balloon design reduces glare and shadows, creating a comfortable and uniform lighting environment. Built to withstand various weather conditions, these durable light towers ensure reliable performance even in challenging environments.

Features

1. Original design function: Filtration device - Dust absorption;

2. Wide area coverage with 360° illumination;3. Glare-free, diffused lighting; Lightweight and portable;

4. High Efficiency ≥160lm/W; Low power consumption;

5. Water-resistant LED balloon light rated to IP65 standard;

6. Dimmable (≤320W); On-off button switch;

7. Foldable tripod and cover, easy quick setup;

8. Weather-resistant design including a waterproof, UV resistant, and fire retardant balloon; Life span >50,000hrs;

9. Balloon material: Waterproof, translucent, anti-UV, flame-retardant outdoor gauze.

Specifications

Model No.YXR-BL	60W-A	100W-A	120W-A	150W-A	200W-A	320W-A
Power	60W	100W	120W	150W	200W	320W
Lumen (lm)	9600	16000	19200	24000	32000	51200
Lamp Weight (kg)	4.5	5.0	5.2	8.5	8.8	9.2
Inflated Dimension	D40*H30			D60*H40		
Light Efficiency	160lm/W					
LED Chips	Lumileds 2835					
Voltage	AC 100-277V					
CRI	≥70Ra					
CCT	3000K~6000K (Adjustable)					
IP Grade	IP65					
Work Temp	-20~60℃					

Tripod		
Height(min-max)	Collapsed Height	Net Weight
1070-1900mm	1.05m	6.3kg

Products Details

LED Balloon Light

60W~1400W / 160lm/W

Patent design

- Color temperature adjustable, Dimmable(≤320W).
- Foldable tripod and cover; Lightweight; Portable; Easy quick setup.
- Glare-free; Diffused light; 360° illumination; Dimmable; On-off button switch.
- High Efficiency ≥160lm/W; Low power consumption.
- Weather resistance; Life span > 50,000hrs; Low maintenance.
- Balloon material: Waterproof, translucent, anti-UV, flame-retardant.
- Filtration device: Dust absorption.

LED Balloon Light
500W~1400W

LED Balloon Light
60W~320W

BL-60W~120W-A
LED Balloon Light
NEW

♦ Specifications

Model	YXR-BL-A
	Power	60W / 100W / 120W
	Voltage	AC90-277V
	Frequency	50/60Hz
	PF	≥0.95
	LED Driver	Lumileds 2835
Lamp	LED Chips	UShineray
	Lumen	9600lm / 16000lm / 19200lm
	CRI	70Ra
	CCT	3000K-6000K(Adjustable)
	Inflated Dimension	400x300mm
	Lamp Weight	4.5kg/ 5.0kg/ 5.2kg
Stand	Height(min-max)	1070-1900mm
	Collapsed Height	1.35m
	Net Weight	6.3kg

60W	Radius(m)	1	4	8	12.4
0° PANEL ANGLE AT 2.4M HEIGHT	Area(m²)	3	50	201	330
	Lux(lx)	115	18	4	0.5
100W	Radius(m)	1	4	8	14
0° PANEL ANGLE AT 2.4M HEIGHT	Area(m²)	3	50	201	615
	Lux(lx)	154	31	4	0.5
120W	Radius(m)	1	4	9	16.9
0° PANEL ANGLE AT 2.4M HEIGHT	Area(m²)	3	50	201	600
	Lux(lx)	179	37	6	0.5

♦ Product Features

Air filtration function

♦ Package Included

All White Diffuser · Stand · Carry Bag for Lamp & Stand · Eye Bolt · Parts Clamp · Stand Adapter · Remote

♦ Product Size

60W/100W/120W

BL-150W~320W-A
LED Balloon Light
NEW

♦ Specifications

Model	YXR-BL-A
	Power	150W / 200W / 320W
	Voltage	AC100-277V
	Frequency	50/60Hz
	PF	≥0.95
	LED Driver	UShineray
Lamp	LED Chips	Lumileds 2835
	Lumen	24000lm / 32000lm / 51200lm
	CRI	70Ra
	CCT	3000K-6000K(Adjustable)
	Inflated Dimension	600mm*400mm
	Lamp Weight	8.5kg/ 8.8kg/ 9.2kg
Stand	Height(min-max)	1070-1900mm
	Collapsed Height	1.05m
	Net Weight	6.3kg

150W	Radius(m)	1	4	8	18.5
0° PANEL ANGLE AT 2.4M HEIGHT	Area(m²)	3	50	201	754
	Lux(lx)	218	45	10.5	0.5
200W	Radius(m)	1	4	9	19.5
0° PANEL ANGLE AT 2.4M HEIGHT	Area(m²)	3	50	201	1184
	Lux(lx)	288	59	14	0.5
320W	Radius(m)	1	4	9	20.5
0° PANEL ANGLE AT 2.4M HEIGHT	Area(m²)	3	50	201	1320
	Lux(lx)	340	64	17	0.5

♦ Product Features

Air filtration function

♦ Package Included

All White Diffuser · Stand · Carry Bag for Lamp Stand · Eye Bolt · Parts Clamp · Stand Adapter · Remote

♦ Product Size

150W/200W/320W

USHINERAY

LED Balloon Light | **IP65**

BL-500W-A
LED Balloon Light

NEW

◆ Specifications

	Model	CVS-BL-500W-A
Lamp	Power	500W
	Voltage	AC90-305V
	Frequency	50/60Hz
	PF	≥0.95
	LED Driver	Inventronics
	LED Chips	Lumileds 2835
	Lumen	60000lm
	CRI	70Ra
	CCT	5000K
	Inflated Dimension	700mm/600mm
Tripod	Lamp Weight	17.5kg
	Height(min-max)	1620-3800mm
	Collapsed Height	1.5m
	Net Weight	11.5kg

500W	Radius(m)	1	4	8	24
5° PANEL ANGLE AT A 5M HEIGHT	Area(m²)	3	50	201	1809
	Full power(lx)	194	77	22	8.5
	Half power(lx)	97	38	11	9.5

I LED BALLOON LIGHT

Patent Design / 500W

◆ Product Features

Air filtration function

◆ Package Included

Orange Diffuser | Tripod Adapter | Trolley Case for Light Fixture

◆ Optional

All White Diffuser | Blue Diffuser | Black Diffuser | Tripod | Remote

◆ Product Size

Φ700MM

500W

USHINERAY

LED Balloon Light | **IP65**

BL-600W~800W-A
LED Balloon Light

NEW

◆ Specifications

	Model	CVS-BL-A
Lamp	Power	600W / 700W / 800W
	Voltage	AC90-305V
	Frequency	50/60Hz
	PF	≥0.95
	LED Driver	Inventronics
	LED Chips	Lumileds 2835
	Lumen	96000lm / 112000lm / 128000lm
	CRI	70Ra
	CCT	5000K
	Inflated Dimension	900/620mm
	Lamp Weight	18.1kg/18.5kg/18.8kg
Tripod	Height(min-max)	1620-3800mm
	Collapsed Height	1.8m
	Net Weight	11.5KG

600W	Radius(m)	1	4	8	39
5° PANEL ANGLE AT A 5M HEIGHT	Area(m²)	3	50	201	4069
	Full power(lx)	232	93	27	5.8
	Half power(lx)	116	46	13	2.9
700W	Radius(m)	1	4	8	39
5° PANEL ANGLE AT A 5M HEIGHT	Area(m²)	3	50	201	4524
	Full power(lx)	271	107	31	6.6
	Half power(lx)	135	53	16	3.3
800W	Radius(m)	1	4	8	40
5° PANEL ANGLE AT A 5M HEIGHT	Area(m²)	3	50	201	5024
	Full power(lx)	309	123	43	5.8
	Half power(lx)	154	61	21	2.9

I LED BALLOON LIGHT

Patent Design / 600W-800W

◆ Product Features

Air filtration function

◆ Package Included

Orange Diffuser | Tripod Adapter | Trolley Case for Light Fixture

◆ Optional

All White Diffuser | Blue Diffuser | Black Diffuser | Tripod | Remote

◆ Product Size

Φ900MM

600W/700W/800W

Feedback

Photos just taken
Really not bad
Very good

Good customer service 15:26
👍👍👍👍👍 15:26
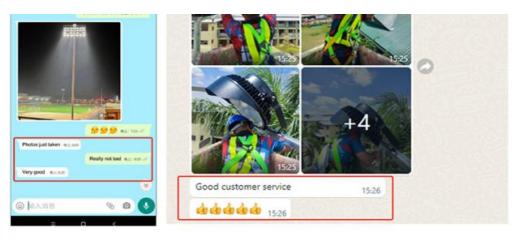
Free lighting consultation, Lighting and circuitry design; DIALux calculation and visualization auto CAD layout.

Combined with your on-site project needs, we will wholeheartedly provide you with professional and detailed light distribution advice and light simulation solutions.
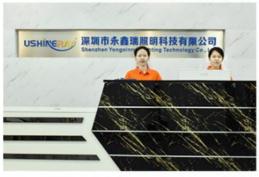
That's great

Your service is great

God will do it

I am satisfied with the sample received this time. We will cooperate for a long time.

9:56

< 112

聊天时长 03:28

星期四 下午 3:52

The goods have been inspected and there are no problems.

If there is no problem on your side

Ready to ship

星期四 下午 4:08

Ok!

No problem

You are my best supplier I am so proud of you

Company Profile

Plant area of **2600** m²

2000 pieces per day

Source Factory

Support customization

Quality service

ushineray.en.alibaba.com

USHINERAY 深圳市永鑫瑞照明科技有限公司
Shenzhen Yongxinrui Lighting Technology Co., Ltd.

PRODUCTION SITE

MANUFACTURING CAPACITY

Guangzhou International Lighting Exhibition

FAQ

Q1. Are you a manufacturer?

Yes, we have our factory with over 10 years of R&D and manufacturing experience based on ISO quality management since 2011.

Q2. Do you have any MOQ limit for LED light orders?

No MOQ, 1pc for sample checking is available.

Q3. Can I get a lower price for a large quantity order?

Yes, please check with our sales staff for the details.

Q4. How about the lead time of ordering?

Our standard sample lead time is 3-5 days, and normal order lead time is 7-10 days. For the large order lead time, please also

check with our sales team.

Q5. Can you provide OEM and ODM services?

we can provide OEM and ODM products, with customized label designs on the product and carton box. Or customized carton box, and

laser print logo on the lamp fixture.

Q6. What are the payment terms of your formal order?

We accept payment via TT, Paypal, Western Union, and we offer EXW terms.

Q7. How do we deal with the defective?

All of our products are produced in a strict quality control system, the defective rate is less than 0.2% according to our shipment records. We offer a 5-year warranty for this product, if there is any defect during the warranty, please provide pictures or video of the working situation of the defective lights, and we will ship the new lights to you within a few days or send it together with your next order.