

1400W High Brightness Glare Free Balloon Light Tower Tripod for Construction Mining

Basic Information

• Place of Origin: Guangdong, China

• Brand Name: UShineray

Model Number: YXR-BL-1400W-A

Minimum Order Quantity: 1pcs

• Payment Terms: T/T, Paypal, Western Union



Product Specification

Color Temperature(CCT): 5000K
IP Rating: IP65
Beam Angle(°): 360°
CRI (Ra>): 70

• Input Voltage(V): AC 90-305V

• Lamp Luminous 160

Efficiency(lm/w):

Lamp Luminous Flux(Im): 224000
Warranty(Year): 5-Year
Working Lifetime(Hour): 50000
Working Temperature(°C): -20~60
Color Rendering Index(Ra): 70

Emitting Color: Cold White, Warm White, White

• Power Supply: Solar, AC, DC

• Light Source: LED



More Images



Product Description





Features: 1. Color temperature adjustable, Dimmable(≤320W); 2. Foldable tripod and cover; Lightweight; Portable; Easy quick setup; 3. Glare-free; Diffused light; 360° illumination; Dimmable; On-off button switch; 4. High Efficiency ≥160lm/W; Low power consumption; 5. Weather resistance; Life span > 50,000hrs; Low maintenance. 6. Balloon material: Waterproof, translucent, anti-UV, flame-retardant outdoor gauze. 7. Filtration device: Dust absorption

Specification

Model E YXR-BL-	500W-A	600W-A	700W-A	800W-A	1000W-A	1200W-A	1400W-A	
Power	500W	600W	700W	800W	1000W	1200W	1400W	
Lumen(L M)	80000	96000	112000	128000	165000	192000	213000	
Weight(kg)	17.5	18.1	18.5	18.8	20	21	22	
Inflated Dimensio n	D70*H60		D90*H60			D110*H85		
Efficacy				160±5 LM/W				
CCT				5000K				
CRI				≥70Ra				
LED Chips			L	umileds 2835	i			
LED Driver				Inventronics				

PF	≥0.95
Input Voltage	AC90-305V
Life Span	50000 hrs
IP	IP65
	Tripod

Tripod


Height(min-max) Collapsed Height Net Weight

1620-3800mm 1.8m 11.5kg

Details Images



- Color temperature adjustable, Dimmable(\$320W).
- Foldable tripod and cover; Lightweight; Portable; Easy quick setup.
- Glare-free; Diffused light; 360° illumination; Dimmable; On-off button switch.
- ♦ High Efficiency ≥160lm/W; Low power consumption.
- Weather resistance; Life span > 50,000hrs; Low maintenance.
- Balloon material: Waterproof, translucent, anti-UV, flame -retardant.
- Filtration device: Dust absorption.

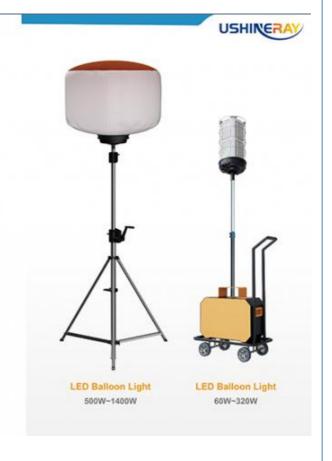





LED BALLOON LIGHT







LED Balloon Light

Specifications

	Please	MOVES 1000M / SUDMI		
	Yillage	A090-277V		
	Frequency	50/W0-W		
	**	1616		
	LES Smar	(combine 2016		
Lamp	LED Chies	Utherway		
	Carter	9600wn/16000/m/16000w		
	CRE	TORu		
	601	2000 4000 (Alpanes)		
	Inflated Clarectures	400x000mm		
	Lang Hogie	4 hg 10ng 10ng		
Stand	Height (min)	10°0-1900mm		
	Column regit	1.85m		
	Not streight	6.bg		





Package Included















	(I)			
GOW Flathages or hand, except of control (units)	1	-	4 301 4	12.6 190 6.6
100W Reduction Area(or') or resolution to the control of the control or the contr	3 154	90 33	201	14 815 85
120W Reduction or rively areas (14") or rively areas (14") or 150 (40")	2 20	* 10 27	200	14.9 600 6.5

Product Size



60W/100W/120W

















Specifications







Package Included





















150W/200W/320W







I LED BALLOON LIGHT











Specifications

	-	1956.004		
	Power	900W		
	Voltage	A096-000V		
	Frearry	1010-9		
	17	16.00		
Lamp	180 Driver	Institute		
-	LED CHEA	Landon 2020		
	Samen	80800m		
	ON	790a		
	1001	5000K		
	Inflated Dimension	700ner900nee		
	Lane Wagit	Tring		
Tripod	regionnes	1620-3600nm		
	Colopset Height	1.5n		
	NetWinget	15.5kg		

Product Features



Package Included





+ Optional









Product Size



500W





















Specifications

	Power	400W / 750W / 508W		
	Yether	ACIO SERV		
	Property	2040-9		
		10 99		
	LEDONA	Particula		
Lamp	LED Chips	Currents 2000		
	Lamen	36000m1110000m110500m4		
	64	79/a		
	007	90004		
	MacDreson .	907430mm		
	Samp Progra	Militag 18 Sept 16 Sep		
Tripod	(Magneton make)	100 Million		
	Collegent Hospit	184		
	that thought	11.949		

Product Features













Optional











◆ Product Size



600W/700W/800W












Feedback

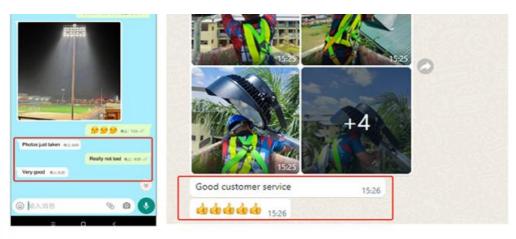

Free lighting consultation, Lighting and circuitry design; DIALux calculation and visualization auto CAD layout.

Combined with your on-site project needs, we will wholeheartedly provide you with professional and detailed light distribution advice and light simulation solutions.

That's great

Your service is great

God will do it


I am satisfied with the sample received this time. We will cooperate for a long time.



Company Profile

OUR FACTORY







PRODUCTION SITE





































Guangzhou International Lighting Exhibition





FAQ

Q1. Are you a manufacturer?

Yes, we have our own factory with over 10 years R&D and manufacture experience base on ISO quality management since 2011.

Q2. Do you have any MOQ limit for led light order?

No MOQ, 1pc for sample checking is available.

Q3. Can I get a lower price for large quantity order?

Yes, please check with our sales staff for the details.

Q4. How about the lead time of ordering?

Our standard lead time for sample is 3-5 days, and normal order lead time is 7-10 days. For the large order lead time, please also

check with our sales team.

Q5. Can you provide OEM and ODM service?

we can provide OEM and ODM product, with customized label design on the product and carton box. Or customized carton box, and

laser print logo on the lamp fixture.

Q6. What is the payment terms of your formal order?

We accept payment via TT, Paypal, Western Union, and we offer EXW terms.

Q7. How to deal with the defective?

All of our product are produced in strict quality control system, the defective rate is less than 0.2% according to our shipment records. We offer3- 5 years warranty for this product, if there is any defective during the warranty,

please provide the picture or video for the working situation of the defective lights, we will ship the new lights to you within a few days or send it together with your next order.

USHINERAY Shenzhen Yongxinrui Lighting Technology Co., Ltd.

+8613410523891

joy@ushineray.com



ushineraylight.com

4F, Building C, Junxing Optoelectronic Industrial Park, Fuyuan 2nd Road, FuHai Street, Bao'an District, Shenzhen