

High Brightness LED Street Lights Pathway Commercial Street Lights 150W For Road

Our Product Introduction

for more products please visit us on ushineraylight.com

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: UShineray
- Certification: EMC, RoHS, CQC, CCC, CE, FCC, LVD
- Model Number: YXR-SL-150W-B
- Minimum Order Quantity: 1pcs
- Payment Terms: T/T, Paypal, Western Union



Product Specification

- Power: 150W
- Beam Angle(°): T2M
- Lighting Solutions Service: Lighting And Circuitry Design, Onsite Metering, DIALux Evo Layout, LitePro DLX Layout, Auto CAD Layout, Agi32 Layout, Project Installation
- LED Chip: San'an/Lumileds 2835
- Lumen: 25500±5%lm
- Control Mode: APP Control, Remote Control, Sensor Control
- Usage: Street Road Pathway Garden Square Highway Lighting
- Material: Die Casting Aluminum +PC Lens+Glass
- Highlight: **led street lights pathway, pathway commercial street lights, commercial street lights 150w**



More Images



Product Description

High Brightness Street Lamp 150W LED Streetlights for Road Pathway

The 150W LED streetlights deliver exceptional brightness for roadways and pathways. Designed to illuminate streets with high-intensity light, these street lamps ensure clear visibility and improved safety. Their high brightness makes them ideal for enhancing nighttime clarity on roads and pathways, while their energy-efficient design reduces overall power consumption.

Product Features

Die-Cast Aluminum Construction: Made from integrated die-casting aluminum for enhanced strength and durability.

Efficient Lighting Performance: Provides high efficiency with 170lm/W $\pm 5\%$, ensuring bright and effective illumination.

Advanced Control Features: Includes options for 0-10V dimming, time control, light sensors, and IoT capabilities for smart lighting solutions.

Effective Heat Management: Features a flat honeycomb design that promotes superior heat dissipation.


Versatile Mounting Angles: Mounting shaft can be adjusted to 90° or 180° ($\pm 15\%$), offering flexible installation options.

IP67 Rated: Equipped with IP67 protection, ensuring reliable performance in various weather conditions.


Product Parameters

Model	YXR-SL-150W-B
Wattage	150W
Other Power Options	30W 50W 70W 100W 200W 240W
Lumen	25500 $\pm 5\%$ lm
Size(mm)	L647*W241*H75
Net Weight	2.2kg
Light Efficacy	170lm/W $\pm 5\%$
Beam Angle	T2M
LED	Lumileds 2835
Color Temperature	2800-3000K; 3000-3200K; 4000-4500K; 5000-5500K; 6000-6500K
Input Voltage	AC100-277V(MOSO)
CRI	≥ 70 Ra
Mounting Hole(mm)	Ø60
PF	> 0.97
THD	THD $< 15\%$
Work Temperature	-40~60°C
LED Junction Temp	$\leq 80^\circ\text{C}$
Humidity	15%~90% RH, no condensing
IK Grade	IK08
IP Grade	IP66
Life Span	≥ 50000 H (LM80@35°C)
Warranty	5 Years
Finish	Sprayed with outdoor special powder
Body Material	Aluminum + PC
Wire	Rubber cable(3*0.75mm ²) L=0.3m
Electronic Safety Grade	Class I

Products Details

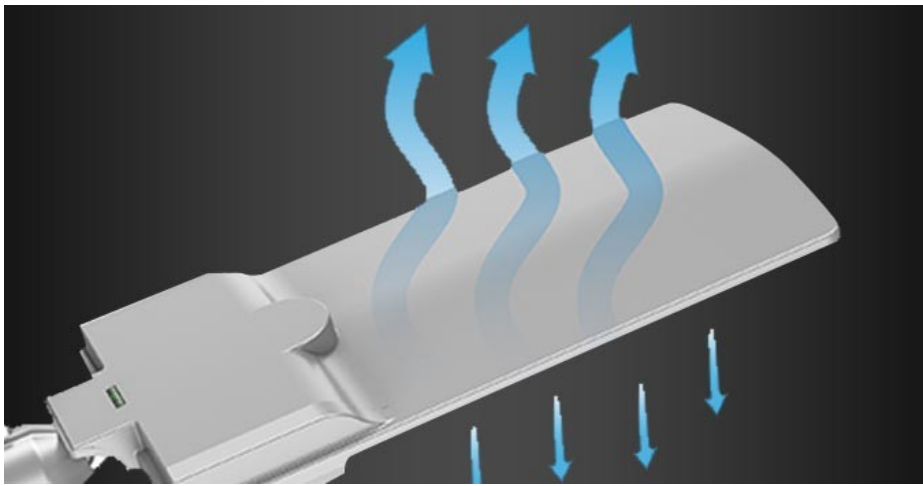

Heavy-duty cast aluminum housing
Durable and has a better heat dissipation effect.

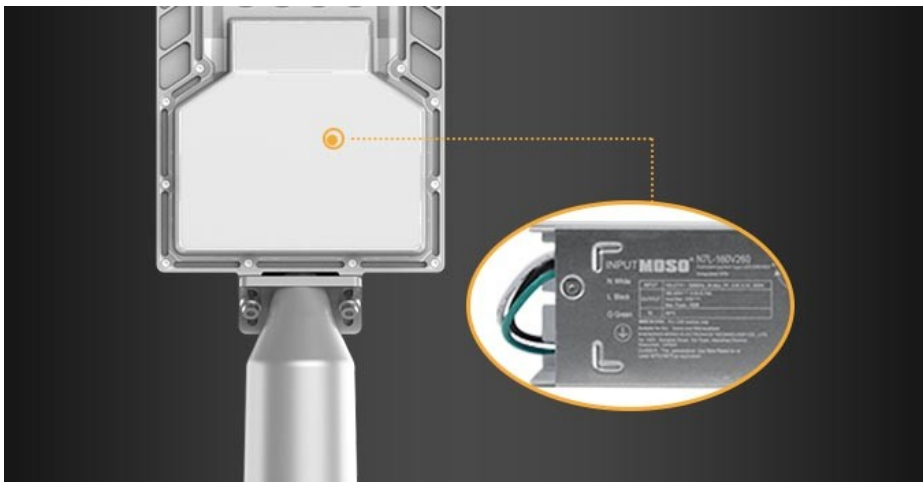

Moso or other famous brand LED driver
High efficiency, energy saving, stable, flicker free, longer span life.




IP66 Waterproof for wet location
IP66 rated for external road way illumination



High bright A-class world-famous brand LED; PC optical lens
 High luminous efficiency up to 170lm/W \pm 5%, low decay without flicker; High transmittance with uniform light output. light transmittance>90%.

Applications

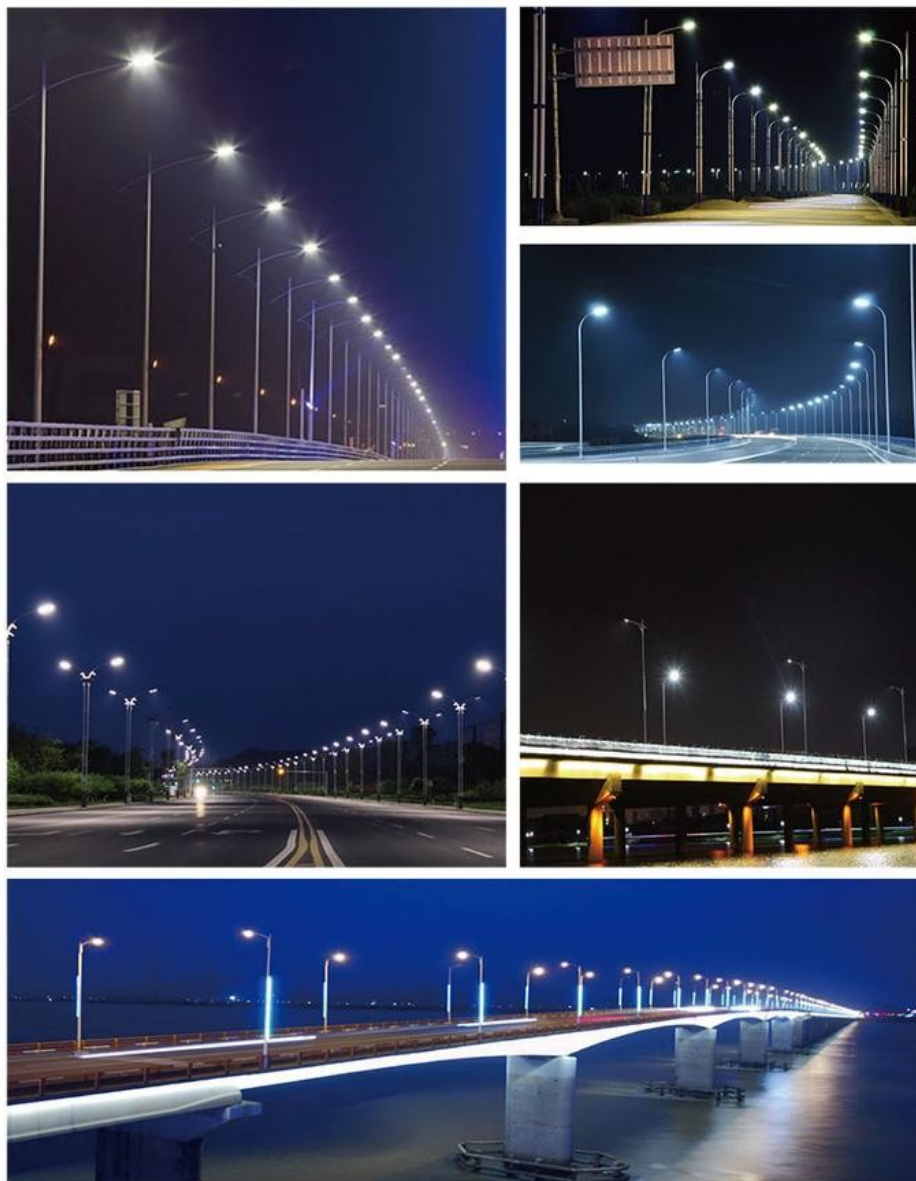



+8613410523891



joy@ushineray.com



ushineraylight.com

4F, Building C, Junxing Optoelectronic Industrial Park, Fuyuan 2nd Road, FuHai Street, Bao'an District,
Shenzhen