

Energy Saving Led Street Lights Night 150Watt LED Street Lamp For Parking Garages

Our Product Introduction

for more products please visit us on ushineraylight.com

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: UShineray
- Certification: EMC, RoHS, CQC, CCC, CE, FCC, LVD
- Model Number: YXR-SL-150W-G2
- Minimum Order Quantity: 1pcs
- Payment Terms: T/T, Paypal, Western Union



Product Specification

- Power: 150W
- Luminous Lux: 21000±5%lm
- Input Voltage: AC100-277V(MOSO)
- LED Chip: Lumileds 2835
- LED Driver: Normal/ MOSO
- Control Mode: APP Control, Remote Control, Sensor Control
- Usage: Parking Garage Lighting
- Material: Die Casting Aluminum +PC Lens+Glass
- Highlight: **energy saving led street lights,**
150watt led street lights,
150watt city street lights



More Images



Product Description

Energy Saving Street Lamps at Night 150W LED Street Lights for Parking Garages

Our 150W LED street lights are engineered for energy savings while providing effective illumination for parking garages. These street lamps offer bright, energy-efficient lighting that reduces power consumption, making them ideal for nighttime use in parking areas. Their high efficiency and energy-saving design contribute to lower operational costs and improved safety in parking garages.

Product Features

SMD2835 LEDs: Provides high efficiency and CRI, achieving up to 140lm/W $\pm 5\%$.

AC Input Range: AC100-277V with constant voltage/current driver, featuring full protection.

Durable 1060 Aluminum: One-piece die-cast with IP66 rating, resistant to water, dust, and corrosion.

Dust Management Design: Fluid dynamics-inspired shape minimizes ash buildup.

Aesthetic and Functional: Effective dust removal and heat management.

Heat Dissipation: Flat panel design with fins for even cooling and extended life.



Product Parameters

Model	YXR-SL-150W-G2
Wattage	150W
Other Power Options	100W 200W 240W 300W
Lumen	21000 $\pm 5\%$ lm
Size(mm)	L565*W250*H70mm
Net Weight	4.0kg
Light Efficacy	140lm/W $\pm 5\%$
Beam Angle	T3/T4
LED	Lumileds 2835
Color Temperature	2800-3000K; 3000-3200K; 4000-4500K; 5000-5500K; 6000-6500K
Input Voltage	AC100-277V(MOSO)
CRI	≥ 70 Ra
PF	> 0.97
THD	THD $< 15\%$
Work Temperature	-40~60°C


Humidity	15%~90% RH, no condensing
IP Grade	IP66
IK Grade	IK08
Mounting Hole(mm)	Ø65
Life Span	≥50000H (LM80@35°C)
Warranty	5 Years
Finish	Sprayed with outdoor special powder
Body Material	Aluminum + PC
Electronic Safety Grade	Class I
Wire	Rubber cable(3*0.75mm²) L=0.3m

Products Details

PRODUCT DISPLAY



Adopt SMD 3030 LED chips

High luminous efficiency, and CRI, the whole lamp light efficacy can be up to 140lm/w.

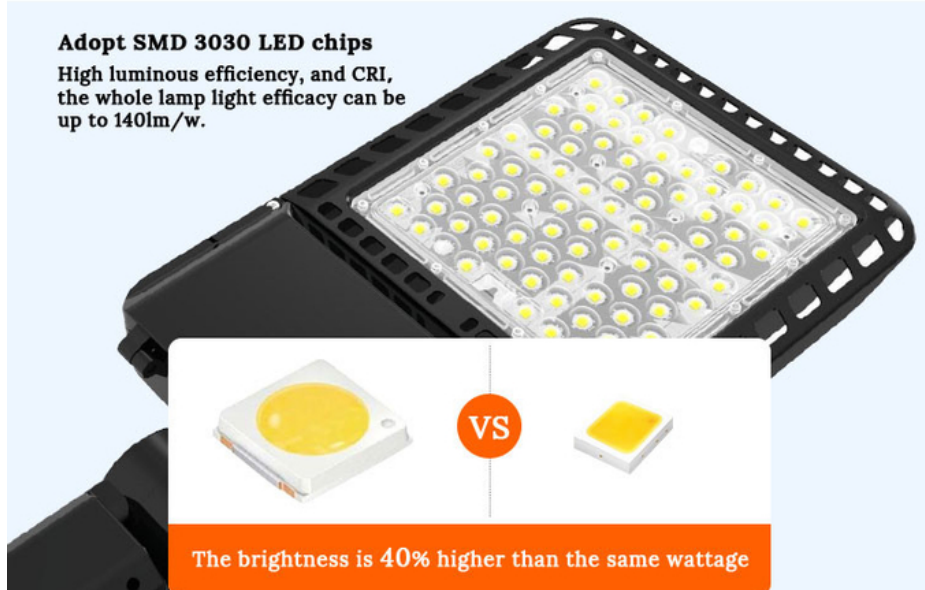

ADC12 high-density aluminum die-casting

Express the heat generated by the light source, quickly reduce the temperature of the light source, and ensure the life of the lamps.

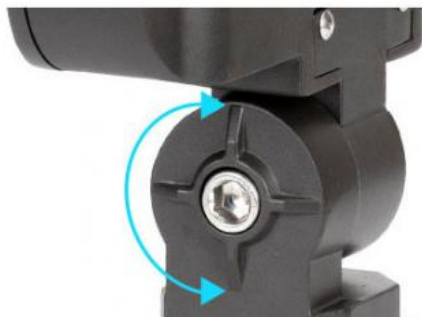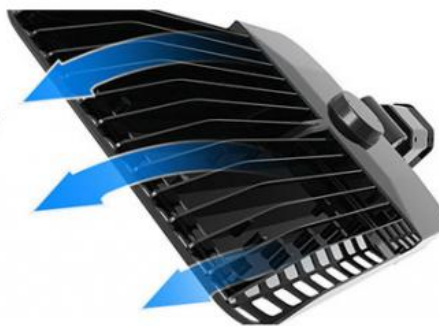

180° Adjustable

Threaded knuckle mounting arm.

Using branded LED driver power supply

Constant voltage and current, with short circuit, overvoltage, overcurrent, and temperature protection to ensure the service life of the lamp.



The whole light IP66 waterproof design

The surface of the lamp is resistant to UV resistance corrosion pollution, high temperature resistance and apply various harsh working environments.

APPLICATION SCENARIO

It is widely used for road lighting of main roads, expressways, overpass, urban streets, overpasses, sidewalks, and other places requiring outdoor lighting, such as squares, schools, residential areas, industrial areas, parks, etc.



PRODUCTION SITE



USHINERAY Shenzhen Yongxinrui Lighting Technology Co., Ltd.

+8613410523891

joy@ushineray.com

ushineraylight.com

4F, Building C, Junxing Optoelectronic Industrial Park, Fuyuan 2nd Road, FuHai Street, Bao'an District, Shenzhen