

7000lm Led Light Street Light 50W Led Light Street Light For Pedestrian Pathways

Basic Information

- Place of Origin:
- Guangdong, China
- Brand Name:
- UShineray
- Certification: EMC, RoHS
- Model Number:
- Minimum Order Quantity:
- Payment Terms:
- EMC, RoHS, CE, FCC, LVD
- er: YXR-SL-50W-P ler Quantity: 1pcs
- ent Terms: T/T, Paypal, Western Union



Product Specification

- Power:
- Luminous Lux:
- Beam Angle:
- LED Chip:
- LED Driver:
- Mounting Hole(Mm):
- Usage:
- Material:
- Highlight:

50W

- 7000±5%lm 60°/90°/120°/T2M/T3M/T4M Lumileds 2835
- Normal/ MOSO
- Ø40/50/60
- Pedestrian Pathways Lighting
- Die Casting Aluminum +PC Lens+Glass
 - 7000lm led street lights, 7000lm city street lights , 50w led street lights



Our Product Introduction





Product Description

Easy Installation Street Lamps at Night 50W Old Street Lights for Pedestrian Pathways

Illuminate your pedestrian pathways with our Easy Installation Street Lamps at Night 50W Old Street Lights. Designed for simplicity and efficiency, these street lamps offer straightforward installation, making them ideal for quick and hassle-free setup. The 50W LED provides bright and effective illumination, enhancing safety and visibility for pedestrians. These lights combine classic design with modern technology, ensuring energy efficiency and long-lasting performance. Built to endure various weather conditions, they are perfect for any pedestrian pathway.

Product Features

Adopt San'an or Lumileds LED chip, low light decay,high CRI, and light efficiency up to 140LM/5%. Tool-free maintenance snap design, which can be opened for maintenance without tools. Integrated IP66 waterproof design, using 304 stainless steel waterproof plug, waterproof and dust-proof, no rust. The rubber wire is used, which is resistant to high and low temperatures, and the plug can be customized for the wire.

Product Parameters

Model	YXR-SL-50W-P
Wattage	50W
Other Power Options	100W 150W 200W 300W
Lumen	7000±5%lm
Size(mm)	568*200*109
Net Weight	3.7kg
Light Efficacy	140lm/W ±5%
Beam Angle	60°/90°/120°/T2M/T3M/T4M
LED	Lumileds 3030
Color Temperature	2800-3000K; 3000-3200K; 4000-4500K; 5000-5500K; 6000-6500K
Input Voltage	AC100-277V(MOSO)
CRI	≥70Ra
PF	>0.97
THD	THD<15%
Work Temperature	-40~60°C
LED Junction Temp	≤80°C
Anti-surge rating	6KV
Humidity	15%~90% RH, no condensing
Mounting Hole(mm)	Ø40/50/60
IP Grade	IP66
IK Grade	IK08
Warranty	5 Years
Life Span	≥50000H (LM80@35°C)
Finish	Sprayed with outdoor special powder
Body Material	Aluminum + PC
Wire	Rubber cable(3*0.75mm ²) L=0.3m
Electronic Safety Grade	Class I

Products Details





Buckle installation

It is more convenient to disassemble any tools.





The installation of the horizontal positioning instrument is more accurate

The lamp head is equipped with a horizontal positioning instrument, which is more convenient and accurate.







RAIN AND LIGHTNING PROTECTION

Fearless of wind and rain, meeting the needs of outdoor use.



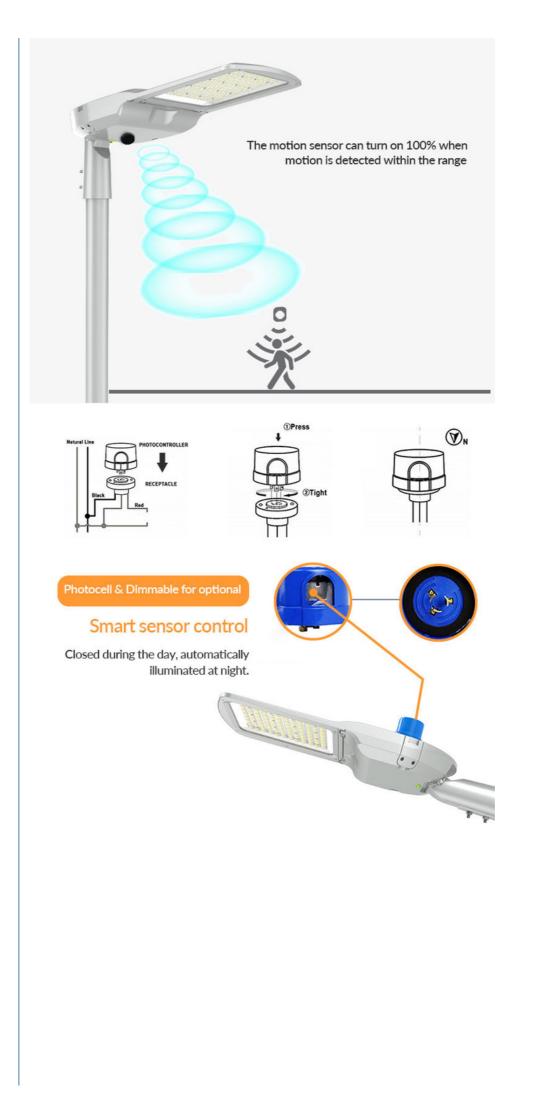

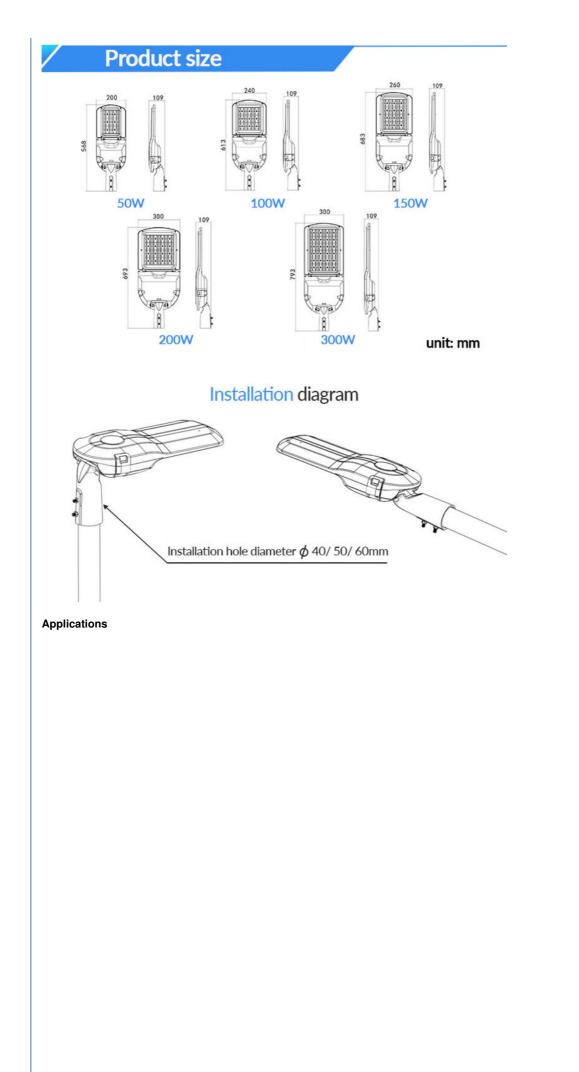



PRODUCTION SITE

.



III III









CAPACITY

恒温恒混箱

MANUFACTURING

