

160lm Per Watt Outdoor LED Flood Lights 60W Led Floodlight For Street Roadway

Our Product Introduction

for more products please visit us on ushineraylight.com

Basic Information

- Place of Origin: Shenzhen, Guangdong, China
- Brand Name: UShineray
- Certification: CE, RoHS
- Model Number: YXR-FL-60W-S
- Minimum Order Quantity: 1 pcs
- Packaging Details: 1 pcs in Inner box
- Payment Terms: T/T, Paypal, Western Union
- Supply Ability: 3000 Piece/Pieces per Week



Product Specification

- Power: 60W
- Lamp Luminous Efficiency(lm/w): 9600lm
- Cri (ra>): 70
- Lamp Body Material: Aluminum Alloy+Tempered Glass
- Certification: CE, RoHS
- Waterproof: IP66
- Application: Roadway, Building
- Warranty: 5 Years
- Highlight: **160lm per watt outdoor led flood lights, for street flood lights outdoor, for street outdoor led flood lights**



More Images



Product Description

160lm per Watt 60W Installing Flood Lights 30W LED Floodlight for Street and Roadway
Featuring an impressive light efficacy of 160lm/W, our 60W installing flood lights and 30W LED floodlights are designed for streets and roadways. These lights deliver bright and efficient illumination, enhancing visibility and safety on roads. With high energy efficiency and durability, they are perfect for illuminating streetways and improving night-time visibility.

Product Features

Innovative Design: Featuring a patented appearance with molding-like cut lines and a unique, stylish look. The compact, beautiful shape adds an aesthetic appeal.

High Efficiency: Reduced power consumption with increased brightness, achieving a light efficiency of 170lm/W. Provides bright, non-glaring light, perfect for various work environments.

Superior Heat Dissipation: Excellent heat dissipation performance with the use of heat-resistant aluminum and comb-shaped fins on the back for highly efficient cooling.

Temperature Control: Maintains a temperature of approximately 50°C even after 3 hours of continuous use, minimizing the risk of heat-related issues.

Waterproof Breather Valve: Equipped with a breather valve that prevents moisture and condensation, ensuring durability.

Quick Installation: Unique design with origami-angled stand corners, allowing installation without removing the stand, significantly reducing time and labor.

Product Parameter

Model	YXR-FL-60W-S
Wattage	60W
Other Power Options	30W 100W 150W 200W 300W 400W 500W
Lumen	9600±5%lm
Size(mm)	230*180*71
Net Weight	2.6kg
Light Efficacy	160lm/W ±5%
Beam Angle	Beam angle: Symmetric 25° 60° 90° Asymmetric 45° (>=150W) & 120°
LED	Lumileds 2835
Color Temperature	3000K-6500K
Input Voltage	AC100-277V
CRI	≥70Ra
PF	>0.97
THD	15%<THD<20%
Work Temperature	-40~60°C
Humidity	15%~90% RH, no condensing
IP Grade	IP66
IK Grade	IK08
Life Span	≥50000H
Warranty	5 Years
Finish	Sprayed with outdoor special powder
Body Material	PC lens + Aluminum housing
Electronic Safety Grade	Class I
Wire	Rubber cable(3*0.75mm²) L=0.3m

Product Details

LED FLOOD LIGHT

30W-500W 170~190lm/W



PRODUCT DETAILS



01

ANGLE ADJUSTABLE 300°

Use it without worry even on rainy days. IP66 waterproof dustproof
Can be used without worry even if it rains when working outdoors.

02

IMPACT RESISTANT FURTHER

Adopts high hardness ADC12 aluminum alloy aluminum shell with excellent heat dissipation lighting fixture has excellent impact resistance.



03



EXCELLENT HEAT DISSIPATION

Heat-resistant aluminum material is used, heat-resistant aluminum is luxuriously used, and heat dissipation performance is further improved with large comb-shaped fins.

PRODUCT DETAILS



2835 LED CHIP

LED chip, high brightness, energy saving and environmental protection



Waterproof Design




High Brightness



Good Heat Dissipation






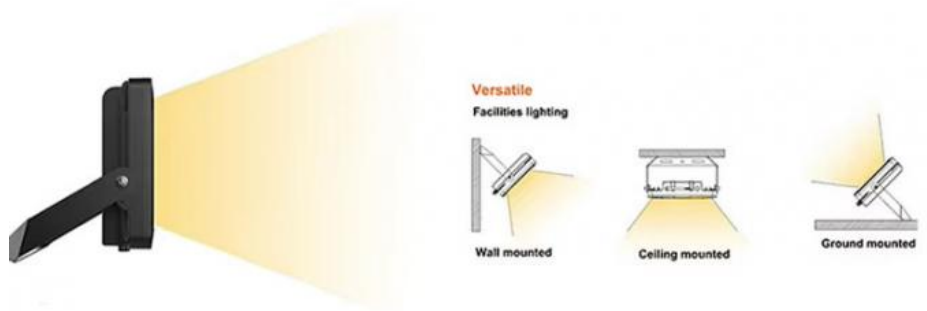

 <p>Outdoor waterproofing</p>	 <p>Bright and uniform</p>	 <p>Energy conservation</p>
 <p>Long life and durability</p>	 <p>Strong heat dissipation</p>	 <p>5-Year warranty</p>

Applications

Widely used in shopping malls, exhibition halls, parking lots, gyms, billboards, parks, sculptures, green lighting projects, buildings, facades, as well as indoor and outdoor lighting for public corridors, stairs and corridors.

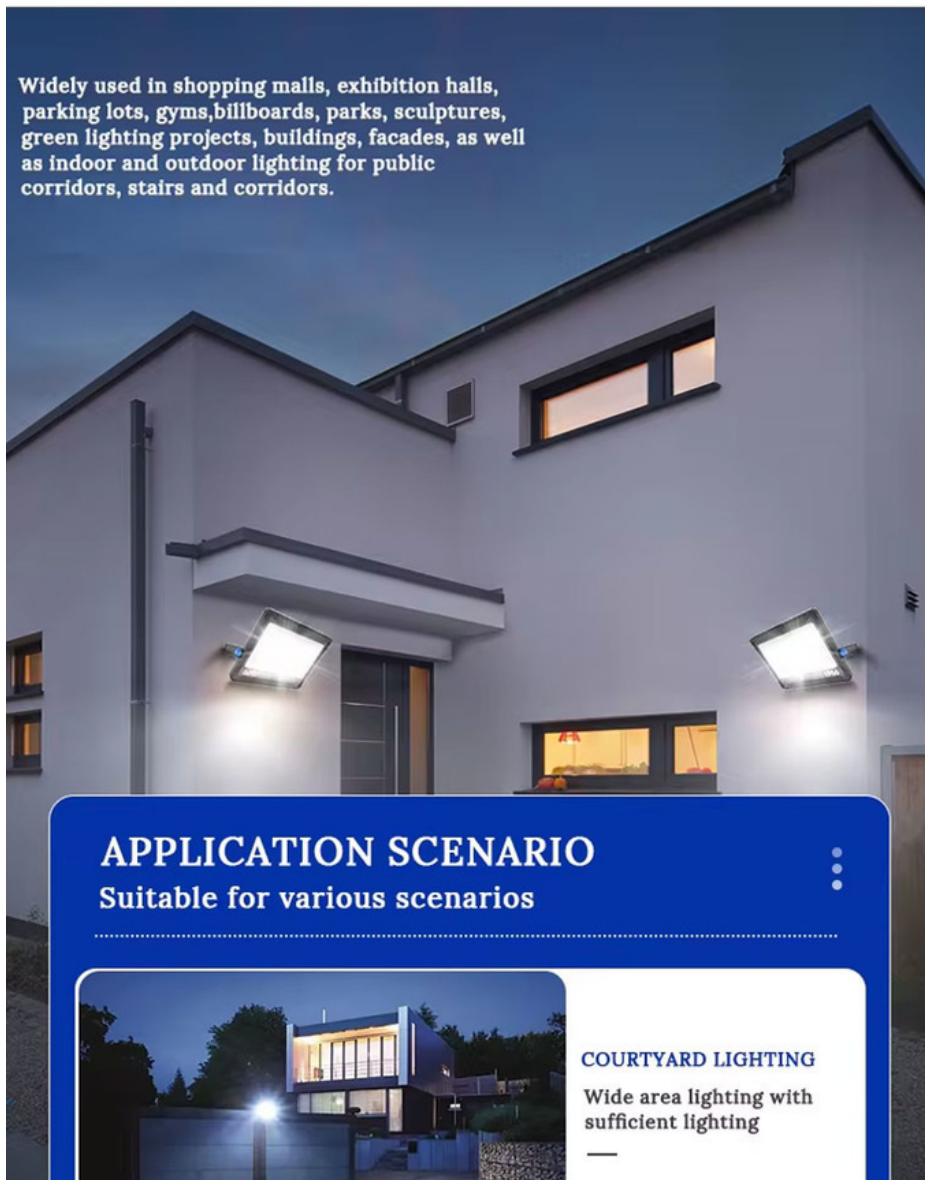

APPLICATION SCENARIO

Suitable for various scenarios



COURTYARD LIGHTING

Wide area lighting with sufficient lighting



ARCHITECTURAL LIGHTING

Wide area lighting with sufficient illumination, high display index, low light attenuation, long service life



BILLBOARD LIGHTING

Wide area lighting with sufficient lighting

FAQ

Q1. Are you a manufacturer?

Yes, we have our factory with over 10 years of R&D and manufacturing experience based on ISO quality management since 2011.

Q2. Do you have any MOQ limit for LED light orders?

No MOQ, 1pc for sample checking is available.

Q3. Can I get a lower price for a large quantity of orders?

Yes, please check with our sales staff for the details.

Q4. How about the lead time of ordering?

Our standard sample lead time is 3-5 days, and normal order lead time is 7-10 days. For the large order lead time, please also check with our sales team.

Q5. Can you provide OEM and ODM services?

We can provide OEM and ODM products, with customized label designs on the product and carton box. Or customized carton box, and laser print logo on the lamp fixture.

Q6. What is the payment terms of your formal order?

We accept payment via TT, Paypal, and Western Union, and we offer EXW, FOB, CIF, and CFR terms.

Q7. How to deal with the defective?

All of our products are produced in a strict quality control system, the defective rate is less than 0.2% according to our shipment records. We offer a 3- 5 years warranty for this product, if there is any defective during the warranty, please provide pictures or videos of the working situation of the defective lights, and we will ship the new lights to you within a few days or send it together with your next order.

 **Shenzhen Yongxinrui Lighting Technology Co., Ltd.**



+8613410523891



joy@ushineray.com



ushineraylight.com

4F, Building C, Junxing Optoelectronic Industrial Park, Fuyuan 2nd Road, FuHai Street, Bao'an District,
Shenzhen